
Super Spacer[®] Herítage





A high performance warm edge spacer system, Super Spacer[®] Heritage is designed especially to meet the needs of the restoration and replication sectors where the overriding criterion is authenticity.

Super Spacer[®] Heritage is neutral in appearance and blends with any frame finish for outstanding aesthetics.

To accommodate a range of traditional rebates Super Spacer[®] Heritage is available with unit cavity options of 4mm, 6mm and 8mm and is just **3mm** in depth for ultra slim sightlines.

Super Spacer[®] Heritage is applied using Edgetech's unique Heritage Shuttle which provides ruler straight edges and sharp 90° corners while enabling fast application with excellent productivity.








Super Spacer[®] Heritage is a pre-desiccated polymeric foam spacer featuring Edgetech's unique dual seal system. A special acrylic adhesive on the spacer edge and a multi-layer vapour barrier backing combine with a hot melt butyl secondary sealant to provide outstanding durability and gas retention. The structural foam is impregnated with a 3A desiccant to a minimum of 38% of its weight.

Glazing of insulated glass units incorporating Super Spacer[®] Heritage should always be carried out in accordance with the recommendations of window and sealant manufacturers and the Glass and Glazing Federation. Units incorporating Super Spacer[®] Heritage and hot-melt butyl are not compatible with linseed oil putties.



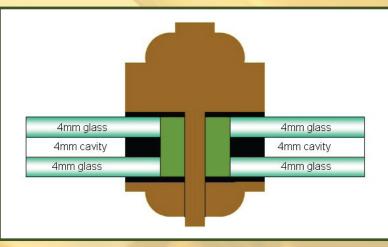

Typical glazing detail - drained & beaded system

Super Spacer[®] Heritage offers the very latest warm edge technology to replicate and even enhance original windows in traditional and historic buildings.

Our Herítage, Your Future?

Tel: 02476 639931 www.edgetechig.co.uk

